



MODEL: GT-BD01B

Oder Code	GT-BD01B
LED	3W/Pcs Osram
Row	Dual Row
Operating Voltage	10-30V DC
Operating Temp	-40~+80 °Celcius
Beam Pattern	Flood, Spot, Combo
ColorTemperature	5700K
Lifetime	30000+h
Lens Material	Polycarbonate
Housing Material	Aluminum
Coating Powder	Sand Black
Mounting System	304 Stainless Steel Side Mount Aluminum Bottom Mount
Pressure Equalization Vent	Yes
Waterproof Rate	Ip67
EMC Protection	ECE R10, ECE R112

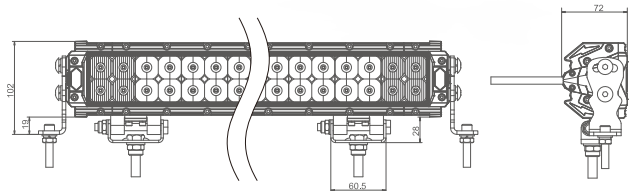

Plastic Decorative Part:
Different Colors Are Available

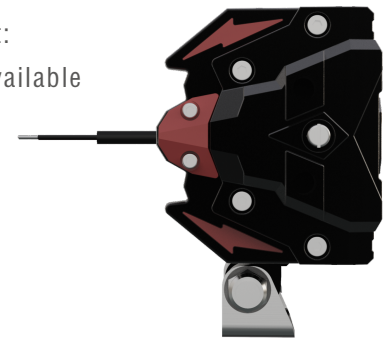

MODEL	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Cable Length	Net Weight	Package Standard
GT-BD01B-12L	7.99"	36W	2.50A@12V, 1.25A@24V	12PCS*3W P7	4080Lm	400mm	1.10Kg/Pcs	6Pcs/Carton
GT-BD01B-20L	11.96"	60W	4.10A@12V, 2.05A@24V	20PCS*3W P7	6800Lm	400mm	1.55Kg/Pcs	6Pcs/Carton
GT-BD01B-24L	13.97"	72W	5.00A@12V, 2.50A@24V	24PCS*3W P7	8160Lm	800mm	1.75Kg/Pcs	4Pcs/Carton
GT-BD01B-40L	21.96"	120W	8.30A@12V, 4.15A@24V	40PCS*3W P7	13600Lm	800mm	2.60Kg/Pcs	4Pcs/Carton
GT-BD01B-52L	27.91"	156W	10.80A@12V, 5.40A@24V	52PCS*3W P7	17680Lm	800mm	3.20Kg/Pcs	2Pcs/Carton
GT-BD01B-60L	31.90"	180W	12.50A@12V, 6.25A@24V	60PCS*3W P7	20400Lm	800mm	3.75Kg/Pcs	2Pcs/Carton
GT-BD01B-80L	41.80"	240W	16.60A@12V, 8.30A@24V	80PCS*3W P7	27200Lm	800mm	4.75Kg/Pcs	2Pcs/Carton
GT-BD01B-96L	49.80"	288W	20.00A@12V, 10.00A@24V	96PCS*3W P7	32640Lm	800mm	5.53Kg/Pcs	3Pcs/Carton
GT-BD01B-100L	51.85"	300W	20.80A@12V, 10.40A@24V	100PCS*3W P7	34000Lm	800mm	5.75Kg/Pcs	4Pcs/Carton